

# Parameter Setup Kit



Read this document thoroughly before operating the product. After reading, retain it close at hand for future reference.

## Safety Precautions

When using this product, be sure to observe all precautions regarding indicated specifications, functions and use. Using this product in any other manner may be detrimental to safety. In the event that the product is damaged, take all appropriate measures to avoid accidents and maintain safety.

### NOTICE


Shows risks that could result in property damage.

- This product is an electronic device that may be damaged due to a drop impact. Exercise due care in handling.
- Do not leave this product at sites where it is subject to direct sunlight, in a sun-heated car or near the fire.
- Do not disassemble or modify this product.
- Avoid use in environments where it may be directly exposed to liquids such as water or oil.


## 1. Unpacking and Verification of Package Components

Before using the product, verify that the following items are present.


- Parameter setting cable (USB)

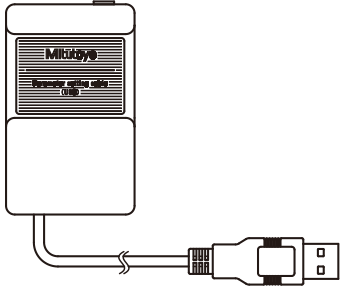

- Connecting cable (1 m): Part No. 905338

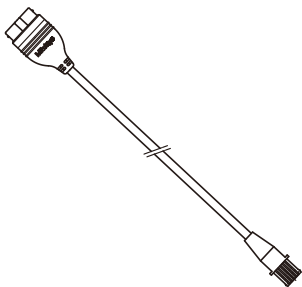

- User's manual (this document)




## 2. Product Overview

This product is a tool kit for setting up parameters of Digimatic indicators: ID-CAX, ID-CGX, and ID-CRX from a PC.

## 3. Setup

- 1 Connect this product to a PC and the Digimatic indicator as shown below by paying attention to the direction of the plug of the connecting cable.

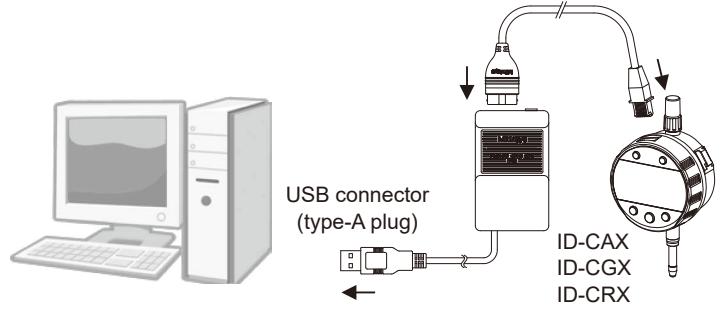

- 2 Download the Parameter Setting Software from the following URL, and install it on the PC.

URL: <https://www2.mitutoyo.co.jp/eng/contact/products/idc-ps/>

### IMPORTANT

The software manual is contained in the download file. Refer to the manual for details about the software.

## 4. Specifications

Item	Specification
Power supply	Supplied with +5 V from a PC via the USB connector (type-A plug).
Compatible OS	Microsoft Windows 7, Windows 8, Windows 8.1, Windows 10
Connector standard	USB connector (type-A plug)
External dimensions	72 mm x 44 mm x 23.5 mm (Box part)
Cable length	900 mm (Parameter setting cable) 1000 mm (Connecting cable)
Operating temperature	0 °C to 40 °C
Storage temperature	-10 °C to 60 °C

- The copyright of this document belongs to Mitutoyo Corporation.
- No part or whole of this document may be transmitted or reproduced by any means without prior written permission of Mitutoyo Corporation.
- Microsoft and Windows are registered trademarks of Microsoft Corporation in USA and all other countries.

For the EU Directive



Authorized representative and importer in the EU:  
Mitutoyo Europe GmbH  
Borsigstrasse 8-10, 41469 Neuss, Germany

For the UK Regulation



Authorized representative and importer in the UK:  
Mitutoyo (UK) Ltd.  
Joule Road, West Point Business Park, Andover,  
Hampshire SP10 3UX, UNITED KINGDOM